
SUMMIT

ABOVE EXPECTATIONS

SUMMIT XPS INSULATION BOARD





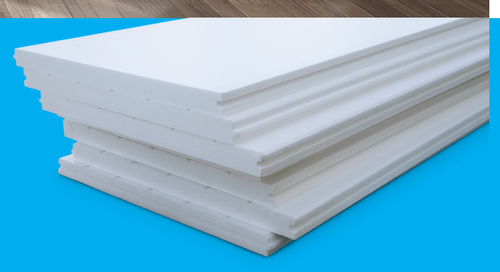

WHAT IS SUMMIT XPS INSULATION BOARD?

XPS, or extruded polystyrene foam board, is a rigid polystyrene with high compressive strength.

Its closed-cell structure provides excellent long-term thermal insulation performance.

PROPERTIES

- Thickness standard 30, 40, 50mm
- Special order 60 – 100mm
- Lengths 1800mm up to 8000mm
- Pine or smooth finish
- Tongue-and-groove edging standard

SUMMIT XPS INSULATION BOARD APPLICATIONS

- Nail-up ceiling, standard ceiling and between truss insulation
- Over-truss, over-rafter insulation
- Over-purlin insulation
- Under floor, cavity wall and perimeter insulation

Standard Thickness	R-Value
30mm	1.00 m².K/W
40mm	1.33 m².K/W
50mm	1.67 m².K/W
60mm*	2.00 m².K/W
70mm*	2.33 m².K/W
80mm*	2.67 m².K/W
100mm*	3.34 m².K/W
Special order thickness*	

D&D ROOF INSULATIONS

Head Office: 012 800 3606

Email: info@roofinsulation.co.za

www.roofinsulation.co.za